


STANDARD GRAVEL STOP CLEAT

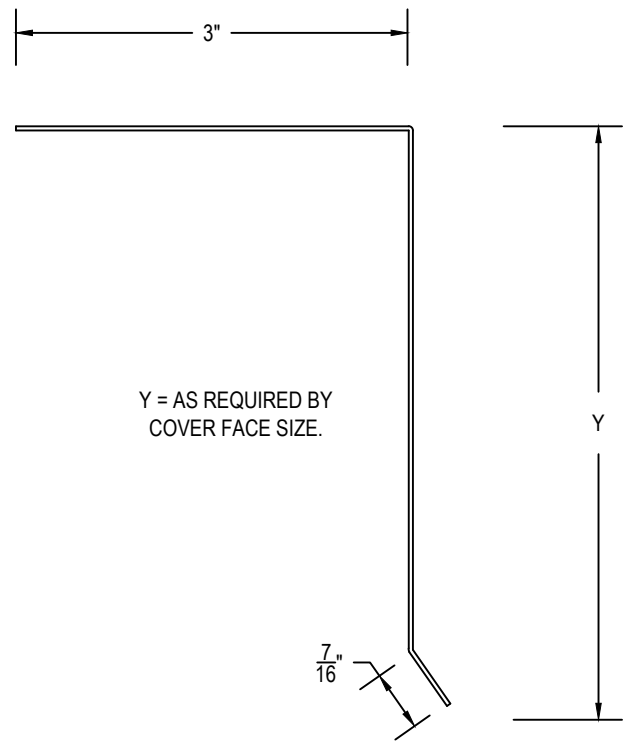

MATERIAL (please choose one):

- | | |
|--------------------------------------|--------------------------------|
| <input type="checkbox"/> 22 GA Steel | <input type="checkbox"/> OTHER |
| <input type="checkbox"/> 20 GA Steel | (PARTS ARE MILL FINISH) |

OTHER: _____

QUANTITIES:

_____ Total Linear Feet (10'-0" Lengths)

Miter/End Cap additional information:

See the attached sheets for miters and end cap

Installation:

- 1) Fastened at 6" O/C minimum or otherwise noted.
- 2) 1.5" SS Ring Shank nails, minimum
- 3) Splice plates require 2 beads of sealant per side at splice

Sheet ___ of ___. DWG# 730-008

Notes:

- 1) Written approval is required prior to fabrication, contractor is responsible for all dimensions and quantities. Fabricated items are not returnable.
- 2) Parts are mill finish unless otherwise indicated.

Project Name: _____

Installing Contractor: _____

Contact Name: _____

Contact number: _____

Signed Approval: _____

Temple Architectural Products
1111 Lowell St.
Elyria, Ohio 44035

(440) 323-9393
Estimates@templearchitecturalproducts.com
www.templearchitecturalproducts.com