


STANDARD DRIP EDGE

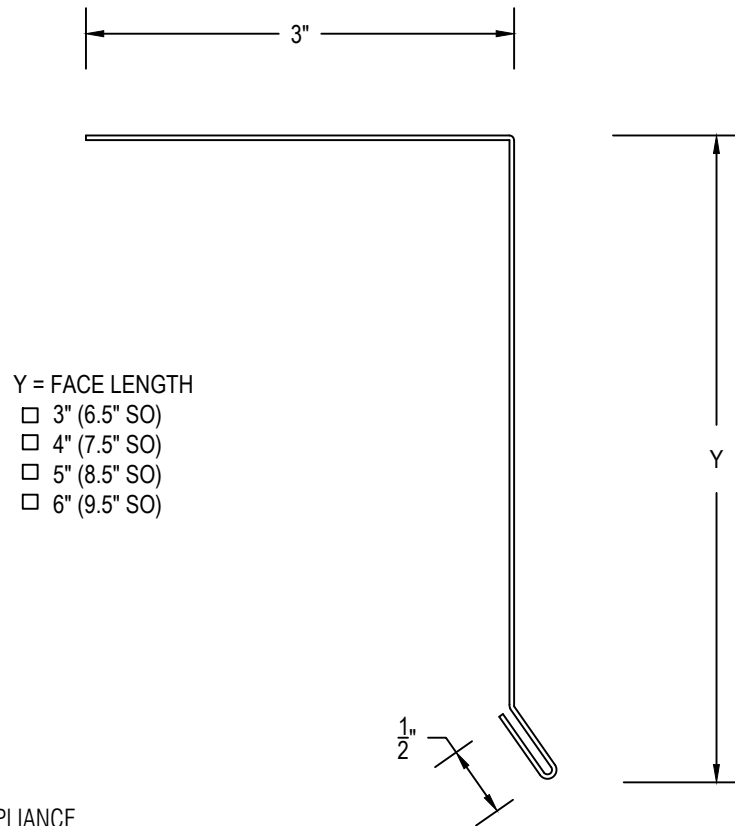

ANSI/SPRI/FM4435 ES-1 COMPLIANCE
REQUIRES CLEAT AND FASTENERS.

MATERIAL (please choose one):

- | | |
|--|--|
| <input type="checkbox"/> 24 GA Steel | <input type="checkbox"/> .040 Aluminum |
| <input type="checkbox"/> 22 GA Steel | <input type="checkbox"/> .050 Aluminum |
| <input type="checkbox"/> .032 Aluminum | <input type="checkbox"/> .063 Aluminum |

Other: _____
Color: _____
Finish: _____

QUANTITIES:

_____ Total Linear Feet (10'-0" Lengths)
_____ Outside Miter(s): _____ Degrees
_____ Inside Miter(s): _____ Degrees

Miter/End Cap Fabrication Requirements:

- | | |
|---|---|
| <input type="checkbox"/> Pop Rivet & Sealed | <input type="checkbox"/> Welded (see note)* |
|---|---|

Installation:
1) Fastened at 6" O/C minimum or otherwise noted.
2) 1.5" SS Ring Shank nails, minimum
3) Splice plates require 2 beads of sealant per side at splice

Sheet ___ of ___ . DWG# 730-001

Notes:
1) *Accessory Welding is only available in .050 aluminum or heavier.
2) 6" wide slip joints are provided (1 per 10'-0" pc/2 per miter).
3) External splice plates are available upon request.
4) Written approval is required prior to fabrication, contractor is responsible for all dimensions and quantities. Fabricated items are not returnable.

Project Name: _____
Installing Contractor: _____
Contact Name: _____
Contact number: _____
Signed Approval: _____

Temple Architectural Products 1111 Lowell St. Elyria, Ohio 44035	(440) 323-9393 Estimates@templearchitecturalproducts.com www.templearchitecturalproducts.com
--	--