


STRAIGHT COPING TRANSITION

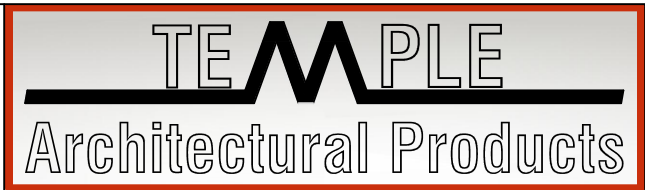


RIGHT

#740-014-01

TAPERED COPING
 FLAT COPING

OUTSIDE FACE

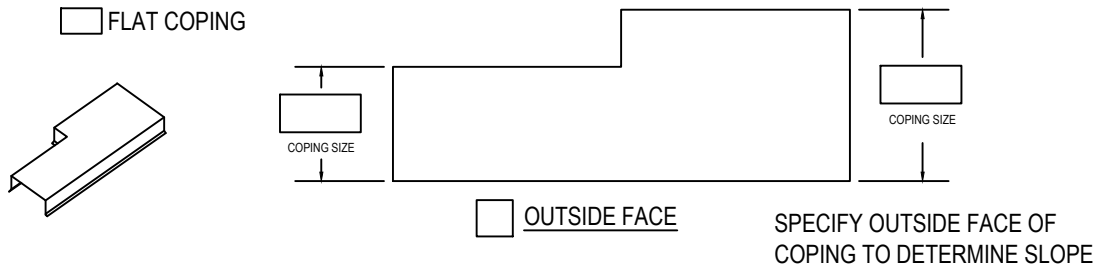

MATERIAL (please choose one):

- | | |
|--|--|
| <input type="checkbox"/> 24 GA Steel | <input type="checkbox"/> .040 Aluminum |
| <input type="checkbox"/> 22 GA Steel | <input type="checkbox"/> .050 Aluminum |
| <input type="checkbox"/> .032 Aluminum | <input type="checkbox"/> .063 Aluminum |

Other: _____
Color: _____
Finish: _____

QUANTITIES:

_____ RIGHT
_____ LEFT

Miter/End Cap Fabrication Requirements:

- Pop Rivet & Sealed Welded (see note)*

Installation:
1) Cleats are to be installed 40" O/C, coping hem crimped to cleat
2) 8 - 1.5" SS Ring Shank nails per cleat, minimum
3) Splice plates require 2 beads of sealant per side of coping

Sheet ___ of ___


DWG# 740-014

LEFT

#740-014-02

TAPERED COPING
 FLAT COPING

OUTSIDE FACE

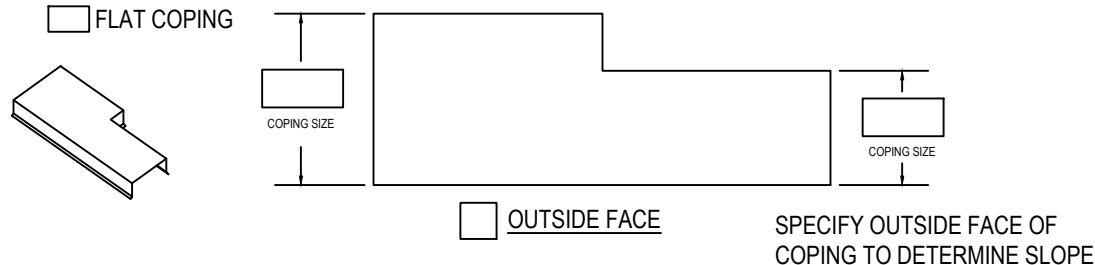

OUTSIDE FACE

SPECIFY OUTSIDE FACE OF COPING TO DETERMINE SLOPE

Notes:

- *Accessory Welding is only available in .050 aluminum or heavier.
- External splice plates are available upon request.
- Written approval is required prior to fabrication, contractor is responsible for all dimensions and quantities. Fabricated items are not returnable.

Project Name: _____

Installing Contractor: _____

Contact Name: _____

Contact number: _____

Signed Approval: _____

Temple Architectural Products
1111 Lowell St.
Elyria, Ohio 44035

(440) 323-9393
Estimates@templearchitecturalproducts.com
www.templearchitecturalproducts.com