
OUTSIDE COPING T-MITER

Architectural Products

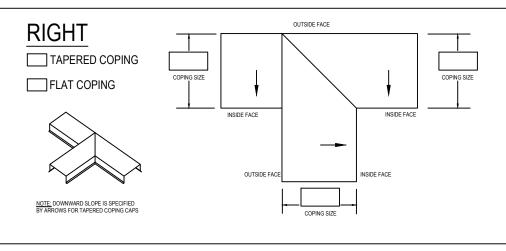

MATERIAL (please choose one):

- □ 24 GA Steel ☐ 22 GA Steel
- □ .040 Aluminum □ .050 Aluminum
- □ .032 Aluminum
- □ .063 Aluminum

Other:

Color: _____

#740-017-01

#740-017-02


Finish:

QUANTITIES:

RIGHT

niui
LEF

_EFT **TAPERED COPING** FLAT COPING



NOTE: DOWNWARD SLOPE IS SPECIFIED

INSIDE FACE

Miter/End Cap Fabrication Requirements:

☐ Pop Rivet & Sealed

☐ Welded (see note)*

Installation:

- 1) Cleats are to be installed 40" O/C, coping hem crimped to cleat
- 2) 8 1.5" SS Ring Shank nails per cleat, minimum
- 3) Splice plates require 2 beads of sealant per side of coping

Sheet DWG# 740-017

Notes:

- 1) *Accessory Welding is only available in .050 aluminum or heavier.
- 2) External splice plates are available upon request.
- 3) Written approval is required prior to fabrication, contractor is responsible for all dimensions and quantities. Fabricated items are not returnable.

Temple Architectural Products 1111 Lowell St. Elyria, Ohio 44035

(440) 323-9393

Estimates@templearchitecturalproducts.com www.templearchitecturalproducts.com

Pro

Ins

Co

Signed Approval:

oject Name:	
stalling Contractor:	
ntact Name:	
ntact number	