


GRAVEL STOP WITH STIFFENER

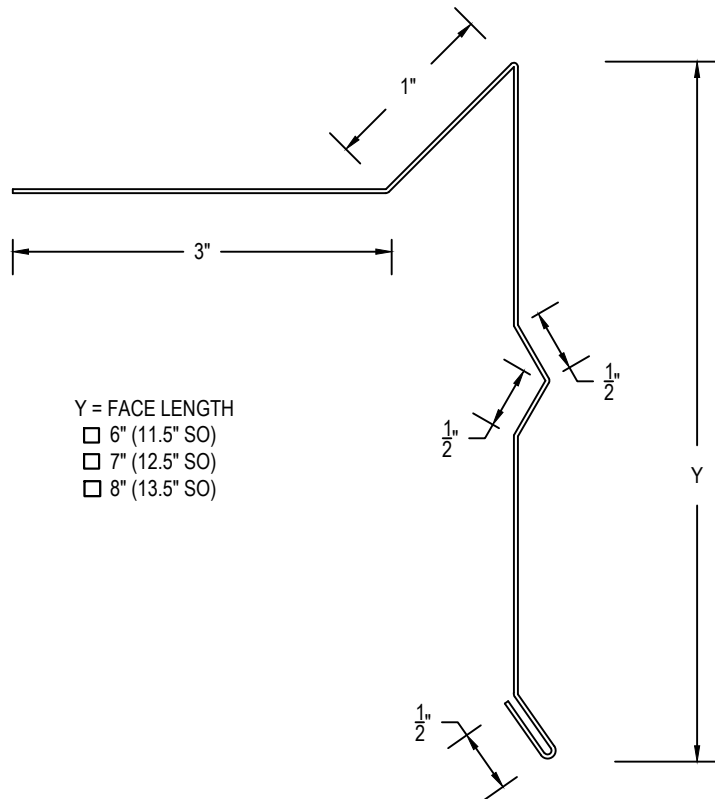

- Y = FACE LENGTH
- 6" (11.5" SO)
 - 7" (12.5" SO)
 - 8" (13.5" SO)

ANSI/SPRI/FM4435 ES-1 COMPLIANCE
REQUIRES CLEAT AND FASTENERS.

MATERIAL (please choose one):

- | | |
|--|--|
| <input type="checkbox"/> 24 GA Steel | <input type="checkbox"/> .040 Aluminum |
| <input type="checkbox"/> 22 GA Steel | <input type="checkbox"/> .050 Aluminum |
| <input type="checkbox"/> .032 Aluminum | <input type="checkbox"/> .063 Aluminum |

Other: _____
Color: _____
Finish: _____

QUANTITIES:

_____ Total Linear Feet (10'-0" Lengths)
_____ Outside Miter(s): _____ Degrees
_____ Inside Miter(s): _____ Degrees

Miter/End Cap Fabrication Requirements:

- Pop Rivet & Sealed Welded (see note)*

Installation:

- 1) Fastened at 6" O/C minimum or otherwise noted.
- 2) 1.5" SS Ring Shank nails, minimum
- 3) Splice plates require 2 beads of sealant per side at splice

Sheet ___ of ___.

DWG# 730-005

Notes:

- 1) *Accessory Welding is only available in .050 aluminum or heavier.
- 2) 6" wide slip joints are provided (1 per 10'-0" pc/2 per miter).
- 3) External splice plates are available upon request.
- 4) Written approval is required prior to fabrication, contractor is responsible for all dimensions and quantities. Fabricated items are not returnable.

Project Name: _____

Installing Contractor: _____

Contact Name: _____

Contact number: _____

Signed Approval: _____

Temple Architectural Products
1111 Lowell St.
Elyria, Ohio 44035

(440) 323-9393
Estimates@templearchitecturalproducts.com
www.templearchitecturalproducts.com