

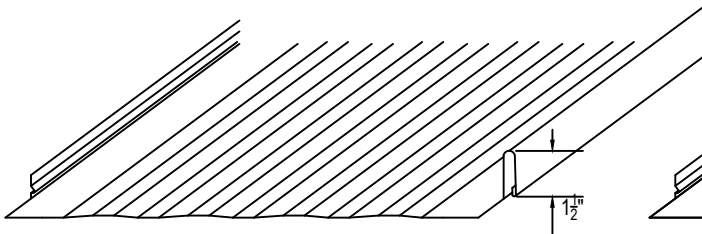



1.5" SNAP SEAM PANEL

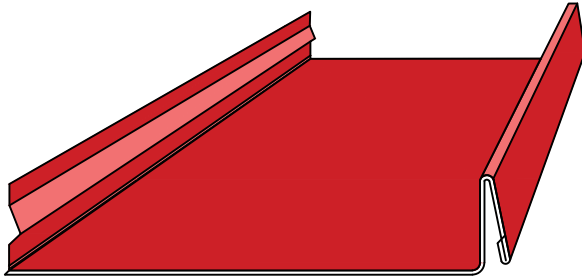

1.5" SNAP SEAM PANEL WITH STRIATIONS
11.75", 15.75", 17.75", 19.75" WIDE PANEL PRE-NOTCHED & TABBED

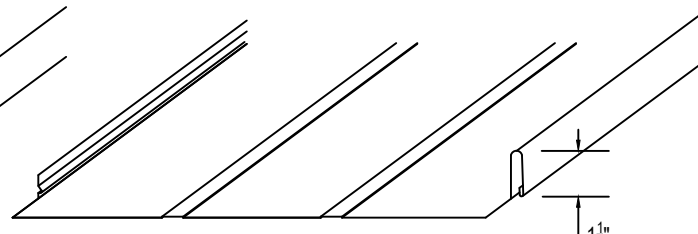

1.5" SNAP SEAM PANEL WITH 2 LOW FLAT BEADS
11.75", 15.75", 17.75", 19.75" WIDE PANEL PRE-NOTCHED & TABBED

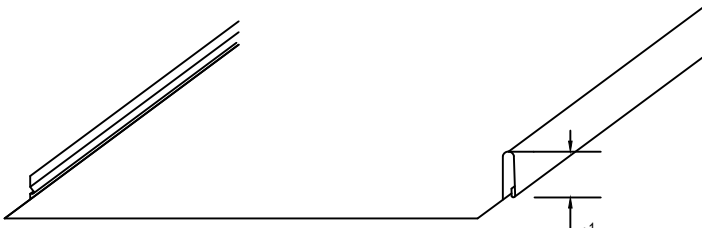

1.5" SNAP SEAM PANEL, SMOOTH
11.75", 15.75", 17.75", 19.75" WIDE PANEL PRE-NOTCHED & TABBED

Available Material

Steel: 26 ga, 24 ga, 22 ga
Aluminum: .032
Copper: 16 oz, 20 oz

Standard and Metallic Colors: 29
Available Finishes: Kynar 500/Hylar 5000, SP

Test Data:

- Wind Uplift.....ASTM 1592
- Wind Uplift UL580.....Class 90
- Wind Uplift.....Dade 90 MPH
- Wind Uplift.....Dade 140 MPH
- Hail.....UL Class 4
- Impact.....UL2218
- Flexural Strength.....ASTM 330
- Flexural Strength.....ASTM E-72
- Water.....Dade Wind Driven Rain
- Water Infiltration.....ASTM 331
- Air Infiltration.....ASTM 283
- Fire Rating.....UL Class A
- Minimum Pitch.....2 : 12
- Custom widths available upon request

Panel information and description:

TIS: 720-001

The Snap Seam Panel offers a concealed clip and interlocking seam that allows for thermal movement due to changes in ambient temperatures. The ease of installation save time which results in faster project completion. The panel can be installed over solid substrates or over open perlin's (upon review). High temperature underlayment is required when used over solid substrate applications. Many of the colors are Energy Star compliant; see color chart for applicable data and colors. Custom colors are available upon request (minimum and overages will apply). The panel design makes for a great residential or commercial option. Weather Tight Warranties are available upon review of drawings and project requirements.



Notes:

- Panels install with clip to allow unrestricted thermal movement; spacing is dependent on uplift requirements and panel material used. Clips are available in galvanized steel or stainless steel.
- It is recommended to use stiffener beads or striations for wider panel faces in order to minimize "oil canning". Oil canning is not a cause for rejection.

Temple Architectural Products
1111 Lowell St.
Elyria, Ohio 44035

(440) 323-9393
Estimates@templearchitecturalproducts.com
www.templearchitecturalproducts.com

1.5" NAIL LEG PANEL

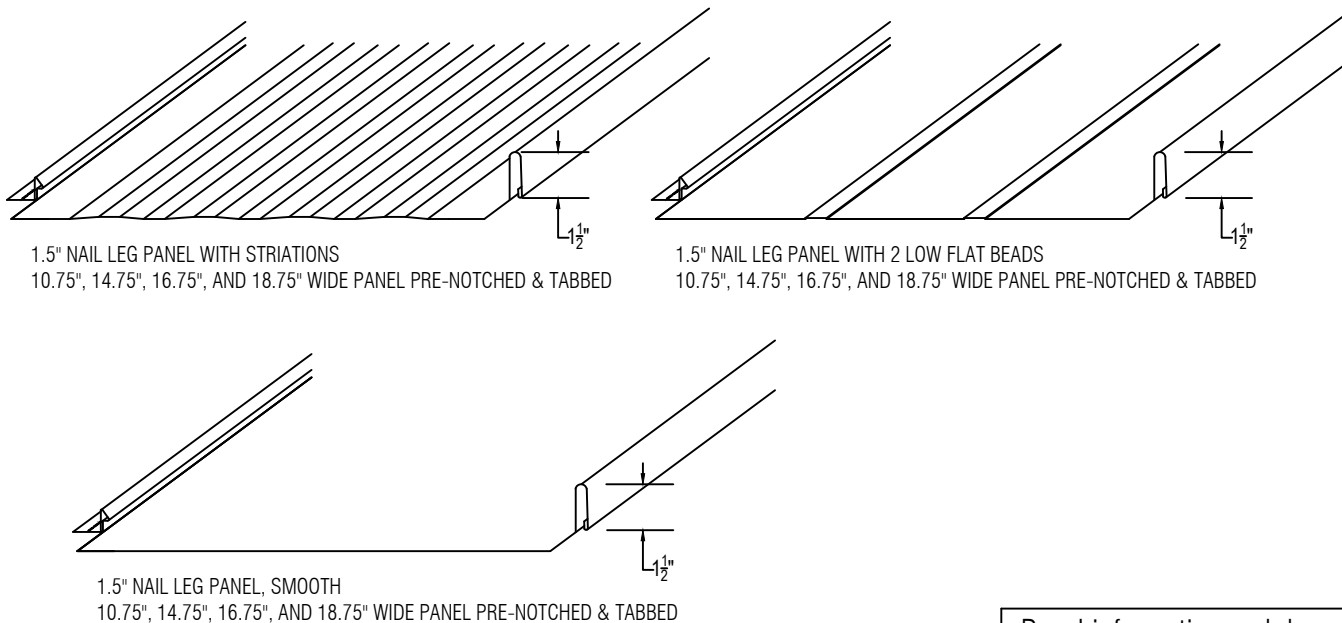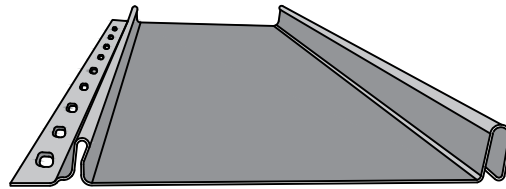

Available Material

Steel: 26 ga, 24 ga, 22 ga
Aluminum: .032
Copper: 16 oz, 20 oz

Standard and Metallic Colors: 29
Available Finishes: Kynar 500/Hylar 5000, SP

Test Data:

- Wind Uplift.....ASTM 1592
- Wind Uplift UL580.....Class 90
- Wind Uplift.....Dade 80 MPH
- Wind Uplift.....Dade 140 MPH
- Hail.....UL Class 4
- Impact.....Dade Impact
- Water.....Dade Wind Driven Rain
- Fire Rating.....UL Class A
- Minimum Pitch.....2: 12
- Custom widths available upon request

Panel information and description:

TIS: 720-002

The Nail Leg Panel offers a concealed fastener through an elongated hole and interlocking seam that allows for thermal movement due to changes in ambient temperatures. With no clips, the installation is quick which results in faster project completion at an economical cost. The panel is to be installed over solid substrates. High temperature underlayment is required when used over solid substrate applications. Many of the colors are Energy Star compliant; see color chart for applicable data and colors. Custom colors are available upon request (minimum and overages will apply). The panel design makes for a great residential or commercial option.



Notes:

- Panels install with low profile screws thru the slotted flange; spacing is dependent on uplift requirements and panel material used. Screws are available in plated or stainless steel.
- It is recommended to use stiffener beads or striations for wider panel faces in order to minimize "oil canning". Oil canning is not a cause for rejection.


Temple Architectural Products
1111 Lowell St.
Elyria, Ohio 44035

(440) 323-9393
Estimates@templearchitecturalproducts.com
www.templearchitecturalproducts.com


1.5" MECHANICAL SEAM PANEL

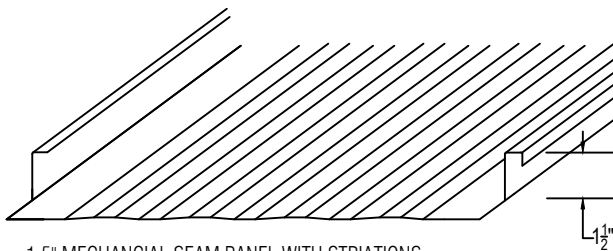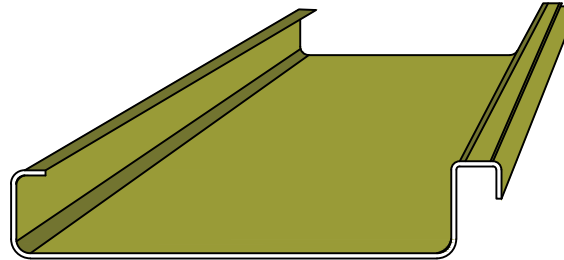

1.5" MECHANICAL SEAM PANEL WITH STRIATIONS
11.75", 15.75", 17.75", AND 19.75" WIDE PANEL PRE-NOTCHED

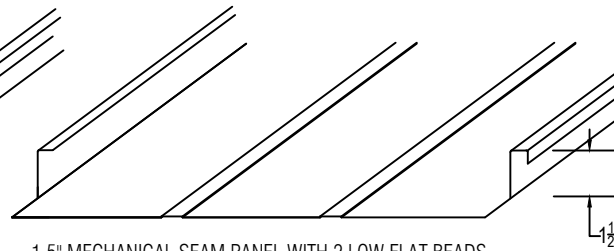

1.5" MECHANICAL SEAM PANEL WITH 2 LOW FLAT BEADS
11.75", 15.75", 17.75", AND 19.75" WIDE PANEL PRE-NOTCHED

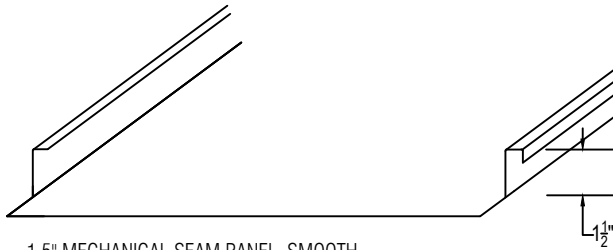

1.5" MECHANICAL SEAM PANEL, SMOOTH
11.75", 15.75", 17.75", AND 19.75" WIDE PANEL PRE-NOTCHED

Available Material

Steel: 26 ga, 24 ga, 22 ga
Aluminum: .032
Copper: 16 oz, 20 oz

Standard and Metallic Colors: 29
Available Finishes: Kynar 500/Hylar 5000, SP

Test Data:

- Wind Uplift.....ASTM 1592
- Wind Uplift UL580.....Class 90
- Wind Uplift.....UL1897
- Wind Uplift.....Dade 80 MPH
- Wind Uplift.....Dade 140 MPH
- Hail.....UL Class 4
- Impact.....Class 4
- Impact.....UL 2218
- Flexural Strength.....ASTM 330
- Water Submersion.....ASTM E 2140
- Water Infiltration.....ASTM E 1646
- Air Infiltration.....ASTM E 1680
- Fire Rating.....Class A
- Minimum Pitch.....2 : 12
- Custom widths available upon request

Panel information and description:

TIS: 720-003

The Mechanical Seam Panel offers a concealed clip and a mechanical seam that allows for thermal movement due to changes in ambient temperatures. The seam configuration allows for a weather tight seal that has proven durability in any weather conditions. The panel can be installed over solid substrates or over open perlin (upon review). High temperature underlayment is required when used over solid substrate applications. Many of the colors are Energy Star compliant; see color chart for applicable data and colors. Custom colors are available upon request (minimum and overages will apply). Weather Tight Warranties are available upon review of drawings and project requirements.

Notes:

- Panels install with clip to allow unrestricted thermal movement; spacing is dependent on uplift requirements and panel material used. Clips are available in galvanized steel or stainless steel, fixed or floating.
- It is recommended to use stiffener beads or striations for wider panel faces in order to minimize "oil canning". Oil canning is not a cause for rejection.

Temple Architectural Products
1111 Lowell St.
Elyria, Ohio 44035


(440) 323-9393
Estimates@templearchitecturalproducts.com
www.templearchitecturalproducts.com

1.5" CONVEX RADIUS MECHANICAL SEAM PANEL



CONVEX

1.5" MECHANICALLY SEAMED PANEL, SMOOTH, 2 LOW BEADS
11.75", 15.75", 17.75", AND 19.75" WIDE PANEL PRE-NOTCHED

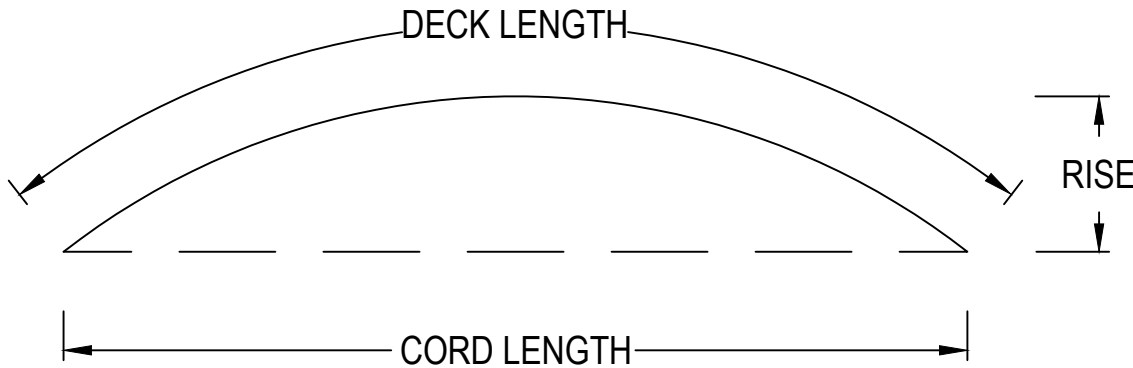

Available Material

Steel: 26 ga, 24 ga, 22 ga
Aluminum: .032
Copper: 16 oz, 20 oz

Standard and Metallic Colors: 29
Available Finishes: Kynar 500/Hylar 5000, SP

Test Data:

- Wind Uplift UL580.....Class 90
- Wind Uplift.....UL1897
- Wind Uplift.....Dade 80 MPH
- Wind Uplift.....Dade 140 MPH
- Hail.....UL Class 4
- Impact.....Class 4
- Impact.....UL 2218
- Flexural Strength.....ASTM 330
- Water Submersion.....ASTM E 2140
- Water Infiltration.....ASTM E 1646
- Air Infiltration.....ASTM E 1680
- Fire Rating.....Class A
- Minimum Radius.....7'-6"
- Custom widths available upon request

Panel information and description:

TIS: 720-003

The Mechanical Seam Panel offers a concealed clip and a mechanical seam that allows for thermal movement due to changes in ambient temperatures. The seam configuration allows for a weather tight seal that has proven durability in any weather conditions. The panel can be installed over solid substrates or over open perlins (upon review). High temperature underlayment is required when used over solid substrate applications. Many of the colors are Energy Star compliant; see color chart for applicable data and colors. Custom colors are available upon request (minimum and overages will apply). Weather Tight Warranties are available upon review of drawings and project requirements.


Notes:

- Panels install with clip to allow unrestricted thermal movement; spacing is dependent on uplift requirements and panel material used. Clips are available in galvanized steel or stainless steel, fixed or floating.
- It is recommended to use stiffener beads or striations for wider panel faces in order to minimize "oil canning". Oil canning is not a cause for rejection.


Temple Architectural Products
1111 Lowell St.
Elyria, Ohio 44035

(440) 323-9393
Estimates@templearchitecturalproducts.com
www.templearchitecturalproducts.com

1.0" SNAP ON BATTEN PANEL

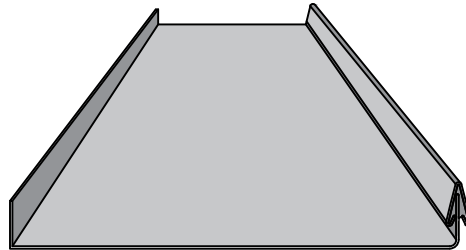

1" SNAP ON BATTEN PANEL WITH STRIATIONS
12", 16", 18", AND 20" WIDE PANEL PRE-NOTCHED

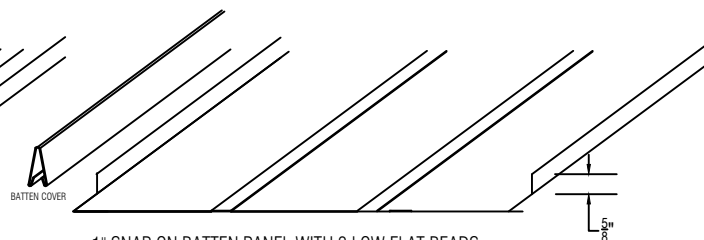

1" SNAP ON BATTEN PANEL WITH 2 LOW FLAT BEADS
12", 16", 18", AND 20" WIDE PANEL PRE-NOTCHED



1" SNAP ON BATTEN PANEL, SMOOTH
12", 16", 18", AND 20" WIDE PANEL PRE-NOTCHED

Available Material

Steel: 26 ga, 24 ga, 22 ga
Aluminum: .032
Copper: 16 oz, 20 oz

Standard and Metallic Colors: 29
Available Finishes: Kynar 500/Hylar 5000, SP

Test Data:

- Wind Uplift UL580.....Class 90
- Air Infiltration.....ASTM E 1680-90
- Fire Rating UL 790.....Class A
- Fire Rating UL 263.....Class A
- Hail UL 2218.....Class 4
- Minimum Pitch.....3 : 12
- Custom widths available upon request

Panel information and description:

TIS: 720-004

The Snap On Batten Panel offers a concealed clip and a snap on seam cap that allows for thermal movement due to changes in ambient temperatures. This panel is also available in a convex radius or a concave radius. The panel is to be installed over solid substrate. High temperature underlayment is required when used over solid substrate applications. Many of the colors are Energy Star compliant; see color chart for applicable data and colors. Custom colors are available upon request (minimum and overages will apply). The panel design makes for a great residential or commercial option.



Notes:

- Panels install with clip to allow unrestricted thermal movement; spacing is dependent on uplift requirements and panel material used. Clips are available in galvanized steel or stainless steel.
- It is recommended to use stiffener beads or striations for wider panel faces in order to minimize "oil canning". Oil canning is not a cause for rejection.


Temple Architectural Products
1111 Lowell St.
Elyria, Ohio 44035

(440) 323-9393
Estimates@templearchitecturalproducts.com
www.templearchitecturalproducts.com

1.0" CONVEX RADIUS SNAP ON BATTEN PANEL

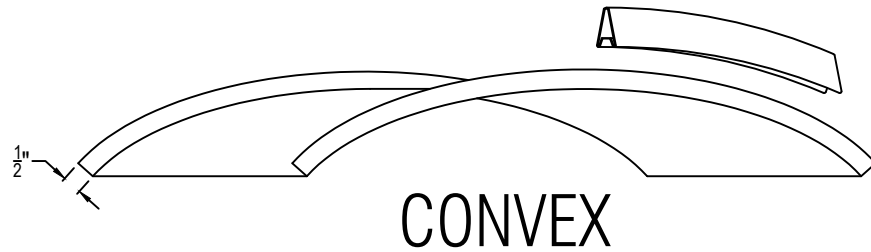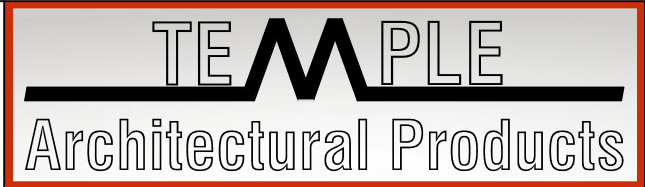

1" SNAP ON BATTEN PANEL, SMOOTH, 2 LOW BEADS
12", 16", 18", AND 20" WIDE PANEL PRE-NOTCHED

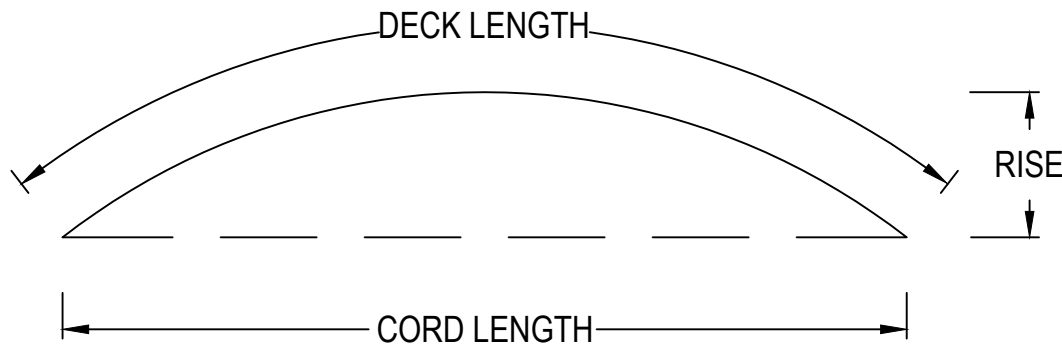

Available Material
Steel: 26 ga, 24 ga, 22 ga Aluminum: .032 Copper: 16 oz, 20 oz
Standard and Metallic Colors: 29 Available Finishes: Kynar 500/Hylar 5000, SP
Test Data: <ul style="list-style-type: none"> • Wind Uplift UL580.....Class 90 • Air Infiltration.....ASTM E 1680-90 • Fire Rating UL 790.....Class A • Fire Rating UL 263.....Class A • Hail UL 2218.....Class 4 • Minimum Radius..... 36" • Custom widths available upon request

Notes:

- Panels install with clip to allow unrestricted thermal movement; spacing is dependent on uplift requirements and panel material used. Clips are available in galvanized steel or stainless steel.
- It is recommended to use stiffener beads or striations for wider panel faces in order to minimize "oil canning". Oil canning is not a cause for rejection.



Panel information and description: TIS: 720-004a

The Snap On Batten Panel offers a concealed clip and a snap on seam cap that allows for thermal movement due to changes in ambient temperatures. This panel is also available in a convex radius or a concave radius. The panel is to be installed over solid substrate. High temperature underlayment is required when used over solid substrate applications. Many of the colors are Energy Star compliant; see color chart for applicable data and colors. Custom colors are available upon request (minimum and overages will apply). The panel design makes for a great residential or commercial option.

Temple Architectural Products
1111 Lowell St.
Elyria, Ohio 44035

(440) 323-9393
Estimates@templearchitecturalproducts.com
www.templearchitecturalproducts.com

1.0" CONCAVE RADIUS SNAP ON BATTEN PANEL

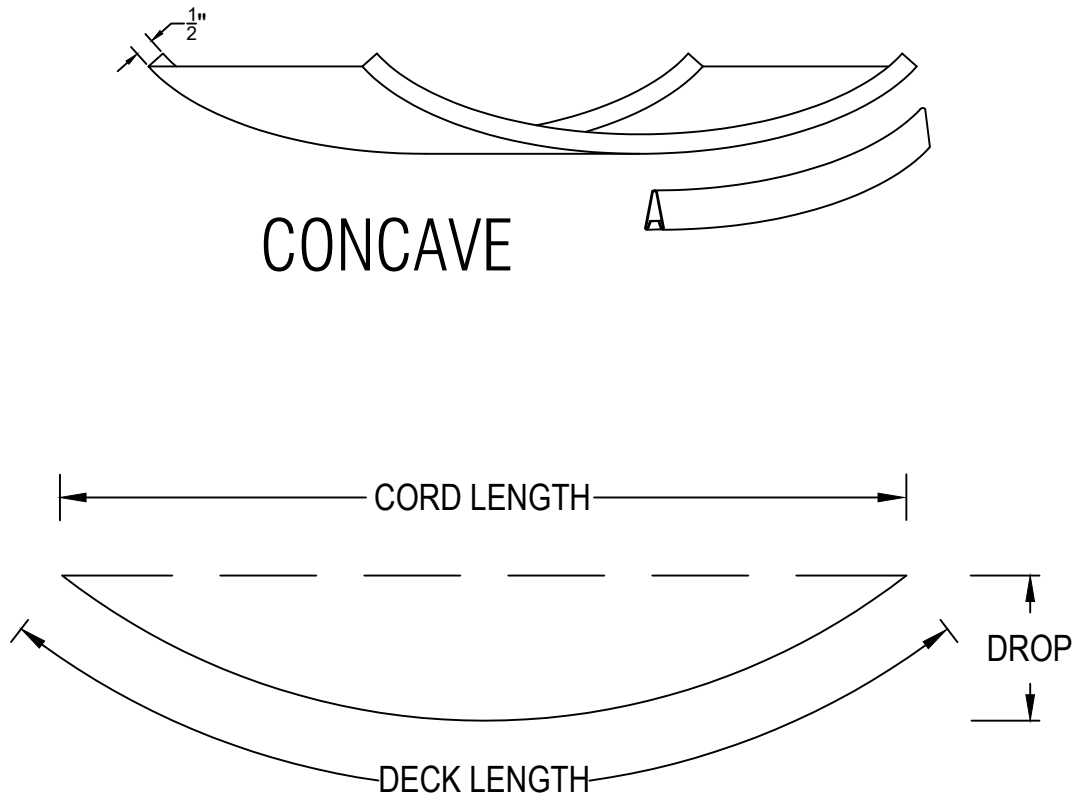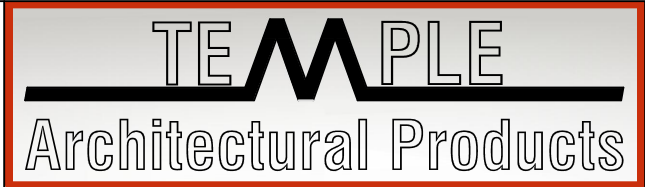

Available Material
Steel: 26 ga, 24 ga, 22 ga Aluminum: .032 Copper: 16 oz, 20 oz
Standard and Metallic Colors: 29 Available Finishes: Kynar 500/Hylar 5000, SP
Test Data: <ul style="list-style-type: none"> • Wind Uplift UL580.....Class 90 • Air Infiltration.....ASTM E 1680-90 • Fire Rating UL 790.....Class A • Fire Rating UL 263.....Class A • Hail UL 2218.....Class 4 • Minimum Radius..... 42" • Custom widths available upon request

Notes:

- Panels install with clip to allow unrestricted thermal movement; spacing is dependent on uplift requirements and panel material used. Clips are available in galvanized steel or stainless steel.
- It is recommended to use stiffener beads or striations for wider panel faces in order to minimize "oil canning". Oil canning is not a cause for rejection.


Panel information and description: TIS: 720-004b

The Snap On Batten Panel offers a concealed clip and a snap on seam cap that allows for thermal movement due to changes in ambient temperatures. This panel is also available in a convex radius or a concave radius. The panel is to be installed over solid substrate. High temperature underlayment is required when used over solid substrate applications. Many of the colors are Energy Star compliant; see color chart for applicable data and colors. Custom colors are available upon request (minimum and overages will apply). The panel design makes for a great residential or commercial option.

Temple Architectural Products
1111 Lowell St.
Elyria, Ohio 44035

(440) 323-9393
Estimates@templearchitecturalproducts.com
www.templearchitecturalproducts.com

2.0" MECHANICAL SEAM PANEL

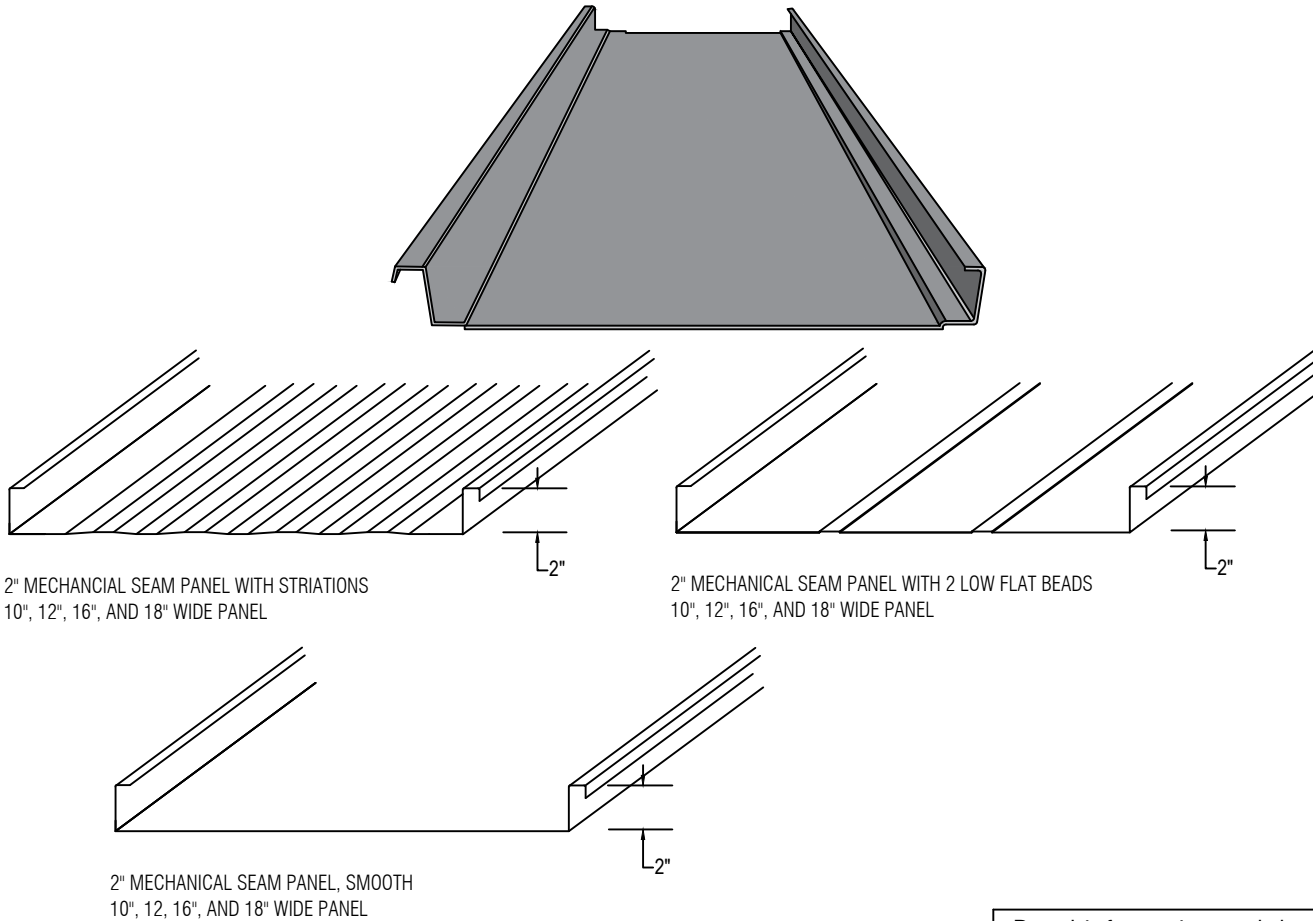

2" MECHANICAL SEAM PANEL WITH STRIATIONS
10", 12", 16", AND 18" WIDE PANEL

2" MECHANICAL SEAM PANEL WITH 2 LOW FLAT BEADS
10", 12", 16", AND 18" WIDE PANEL

2" MECHANICAL SEAM PANEL, SMOOTH
10", 12", 16", AND 18" WIDE PANEL

Available Material
Steel: 26 ga, 24 ga, 22 ga Aluminum: .032 Copper: 16 oz, 20 oz
Standard and Metallic Colors: 29 Available Finishes: Kynar 500/Hylar 5000, SP
Test Data:
<ul style="list-style-type: none"> • Wind Uplift.....ASTM E 1592 • Wind Uplift UL580.....Class 90 • Uplift.....UL1897 • Fire.....UL Class A • Hail.....UL Class 4 • Impact.....UL 2218 • Water Infiltration.....ASTM E 1646 • Air Infiltration.....ASTM E 1680 • Water Submersion.....ASTM E 2140 • Foot Traffic.....FM 4471 • FBC non-HVHZ.....FL18316 • Texas Dept of Insurance...RC-383, RC-384, RC-385, RC-390 • Minimum Pitch.....0.5 : 12 • Custom widths available upon request

Notes:

- Panels install with clip to allow unrestricted thermal movement; spacing is dependent on uplift requirements and panel material used. Clips are available in galvanized steel or stainless steel, fixed or floating.
- It is recommended to use stiffener beads or striations for wider panel faces in order to minimize "oil canning". Oil canning is not a cause for rejection.

Panel information and description:



TIS: 720-005

The Mechanical Seam Panel offers a concealed clip and a mechanical seam that allows for thermal movement due to changes in ambient temperatures. The seam configuration allows for a weather tight seal that has proven durability in any weather conditions. The panel can be installed over solid substrates or over open perlin (upon review). High temperature underlayment is required when used over solid substrate applications. Many of the colors are Energy Star compliant; see color chart for applicable data and colors. Custom colors are available upon request (minimum and overages will apply). Weather Tight Warranties are available upon review of drawings and project requirements.

Temple Architectural Products
1111 Lowell St.
Elyria, Ohio 44035

(440) 323-9393
Estimates@templearchitecturalproducts.com
www.templearchitecturalproducts.com

1.75" SNAP SEAM PANEL

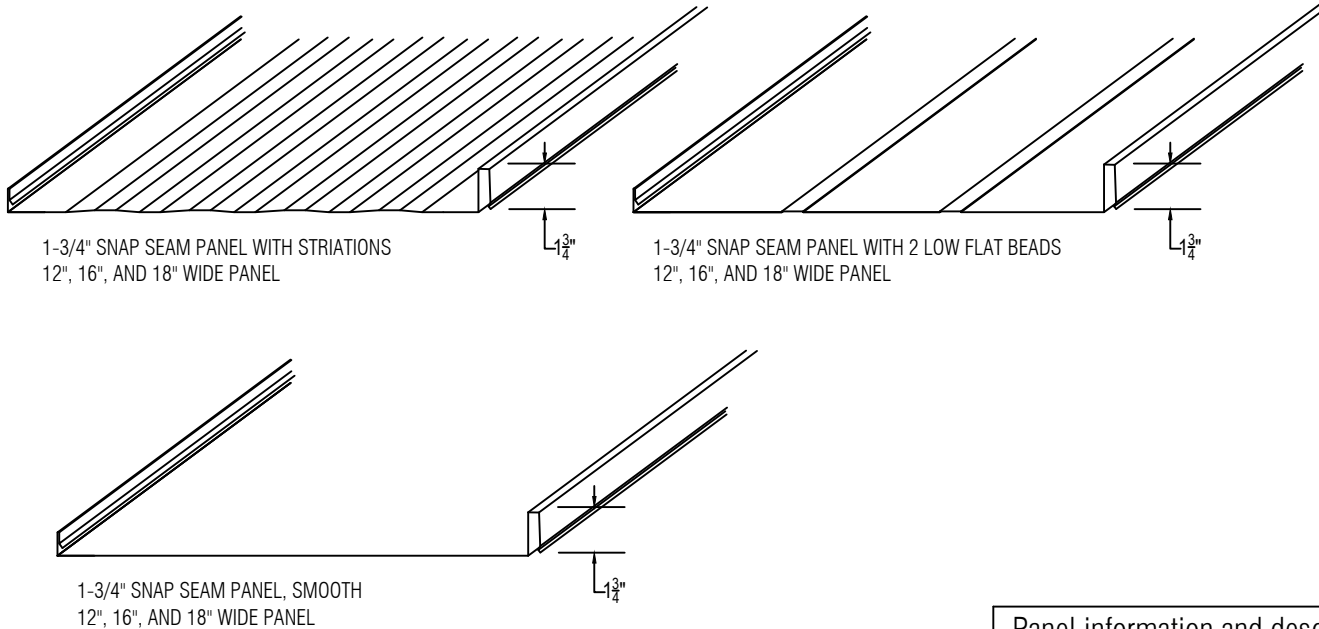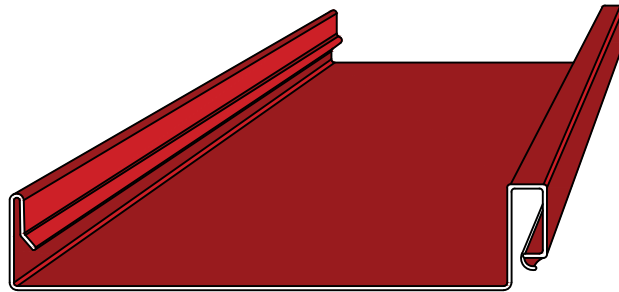

Available Material

Steel: 26 ga, 24 ga, 22 ga
Aluminum: .032
Copper: 16 oz, 20 oz

Standard and Metallic Colors: 29
Available Finishes: Kynar 500/Hylar 5000, SP

Test Data:

- Wind Uplift UL580.....Class 90
- Uplift.....UL1897
- Fire.....UL Class A
- Hail.....UL Class 4
- Water Infiltration.....ASTM E 1646
- Air Infiltration.....ASTM E 1680
- Impact.....UL 2218
- FBC Non-HVHZ.....FL18316
- Uniform Static Pressure....1592
- Texas Dept of Insurance....RC-387,388,389
- Minimum Pitch.....2 : 12
- Custom widths available upon request

Notes:

- Panels install with clip to allow unrestricted thermal movement; spacing is dependent on uplift requirements and panel material used. Clips are available in galvanized steel or stainless steel, fixed or floating.
- It is recommended to use stiffener beads or striations for wider panel faces in order to minimize "oil canning". Oil canning is not a cause for rejection.

Panel information and description:





TIS: 720-006

The Snap Seam Panel offers a concealed clip and a strong snap seam that allows for thermal movement due to changes in ambient temperatures. The seam configuration allows for a weather tight seal that has proven durability in any weather conditions. The panel can be installed over solid substrates or over open perlin (upon review). High temperature underlayment is required when used over solid substrate applications. Many of the colors are Energy Star compliant; see color chart for applicable data and colors. Custom colors are available upon request (minimum and overages will apply). Weather Tight Warranties are available upon review of drawings and project requirements.


Temple Architectural Products
1111 Lowell St.
Elyria, Ohio 44035

(440) 323-9393
Estimates@templearchitecturalproducts.com
www.templearchitecturalproducts.com

1.0" FLUSH SEAM PANEL, SOLID

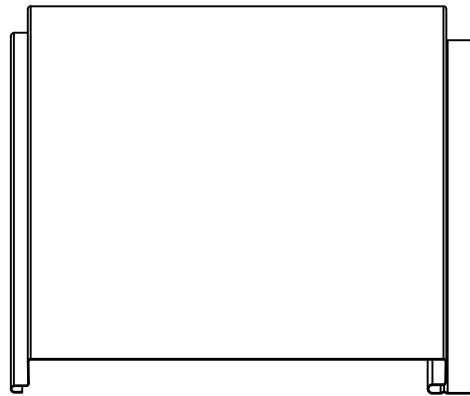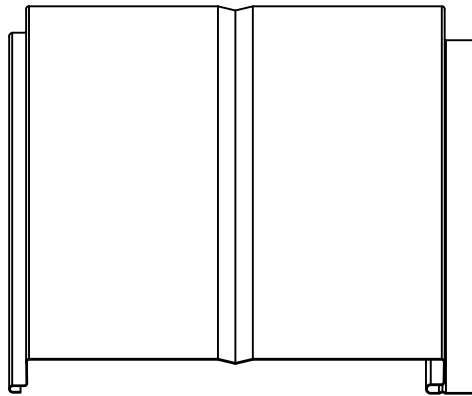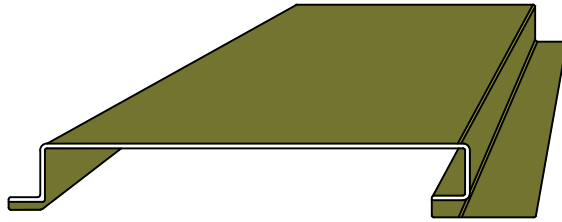

1" FLUSH PANEL WITH CENTER V-BEAD



1" FLUSH PANEL, SMOOTH, SOLID

Available Material

Steel: 26 ga, 24 ga, 22 ga
 Aluminum: .032, .040
 Copper: 16 oz, 20 oz

Standard and Metallic Colors: 29
 Available Finishes: Kynar 500/Hylar 5000, SP

Test Data:

- Wind Uplift.....ASTM 1592
- Wind Uplift UL580.....Class 90
- Water Infiltration.....ASTM E 331
- Air Infiltration.....ASTM E 283
- Custom widths available upon request

Panel information and description:

TIS: 720-007

The Flush Seam Panel offers a concealed fastener and a tongue & groove seam that allows for thermal movement due to changes in ambient temperatures. The panel can be installed over solid substrates or over open perlins (upon review). Panel configurations can include low bead stiffeners, centerline V-Bean, one or two rows of venting (3.08 square inches of venting, per row, per linear foot of panel). Many of the colors are Energy Star compliant; see color chart for applicable data and colors. Custom colors are available upon request (minimum and overages will apply).



Notes:

- It is recommended to use stiffener beads for wider panel faces in order to minimize "oil canning". Oil canning is not a cause for rejection.
- 2" wide stiffening beads are available.

Temple Architectural Products
 1111 Lowell St.
 Elyria, Ohio 44035

(440) 323-9393
 Estimates@templearchitecturalproducts.com
 www.templearchitecturalproducts.com

1.0" FLUSH SEAM PANEL, VENTED

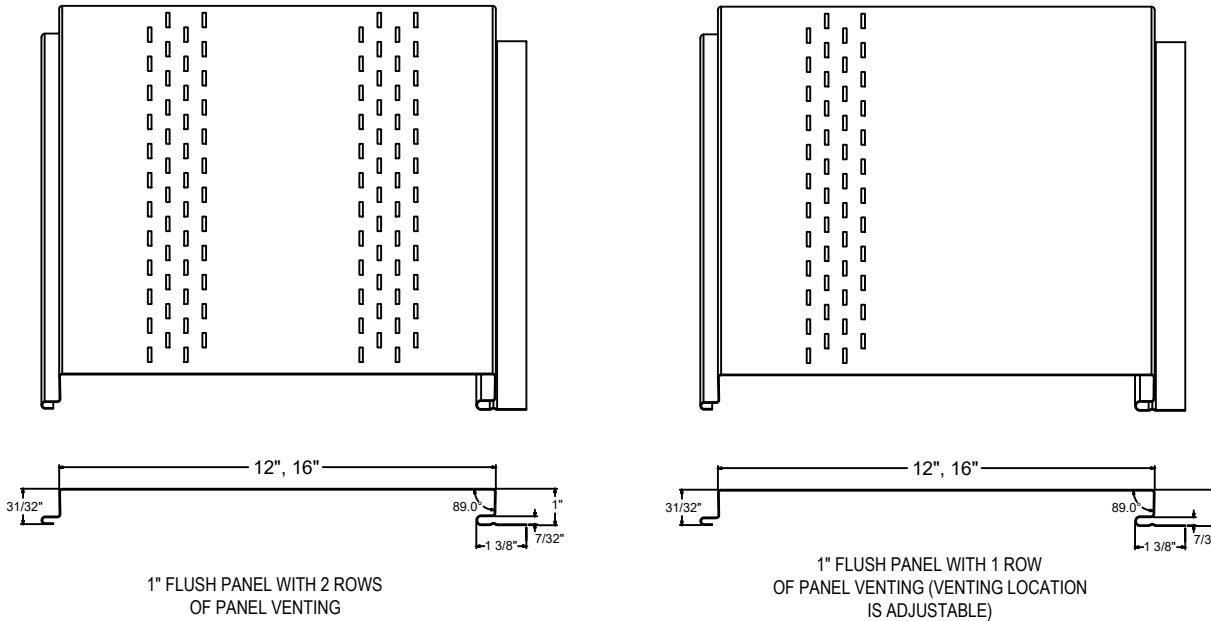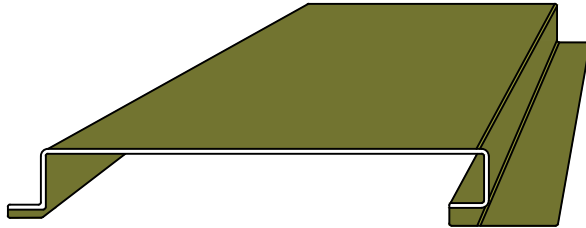

Available Material

Steel: 26 ga, 24 ga, 22 ga
 Aluminum: .032, .040
 Copper: 16 oz, 20 oz

Standard and Metallic Colors: 29
 Available Finishes: Kynar 500/Hylar 5000, SP

Test Data:

- Wind Uplift.....ASTM 1592
- Wind Uplift UL580.....Class 90
- Custom widths available upon request

Panel information and description:

TIS: 720-008

The Flush Seam Panel offers a concealed fastener and a tongue & groove seam that allows for thermal movement due to changes in ambient temperatures. The panel can be installed over solid substrates or over open perlins (upon review). Panel configurations can include low bead stiffeners, centerline V-Bean, one or two rows of venting (3.08 square inches of venting, per row, per linear foot of panel). Many of the colors are Energy Star compliant; see color chart for applicable data and colors. Custom colors are available upon request (minimum and overages will apply).






Notes:

- It is recommended to use stiffener beads for wider panel faces in order to minimize "oil canning". Oil canning is not a cause for rejection.
- 2" wide stiffening beads are available.

Temple Architectural Products
 1111 Lowell St.
 Elyria, Ohio 44035

(440) 323-9393
 Estimates@templearchitecturalproducts.com
 www.templearchitecturalproducts.com

1.0" REVEAL SEAM PANEL, SOLID

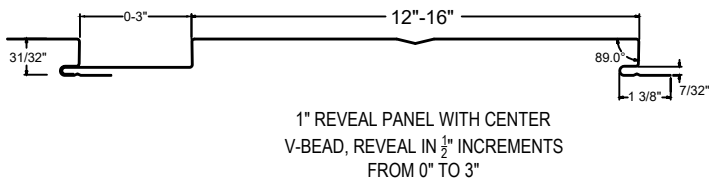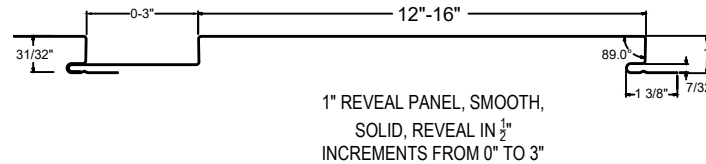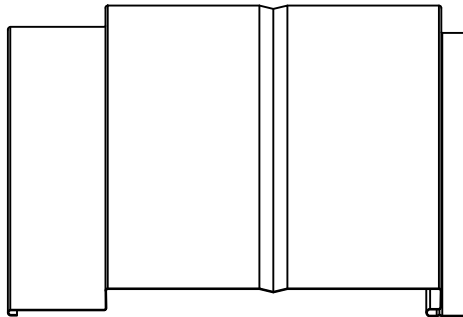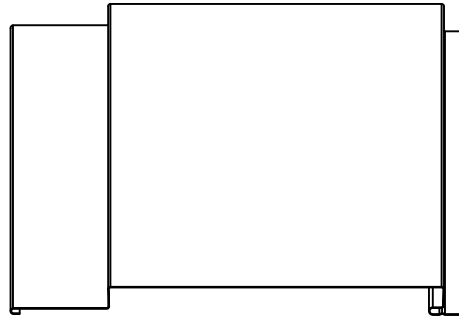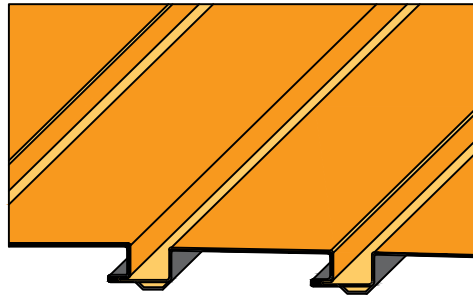

Available Material

Steel: 26 ga, 24 ga, 22 ga
Aluminum: .032, .040
Copper: 16 oz, 20 oz

Standard and Metallic Colors: 29
Available Finishes: Kynar 500/Hylar 5000, SP

Test Data:

- Water Infiltration.....ASTM E 331
- Air Infiltration.....ASTM E 283
- Custom widths available upon request

Panel information and description:

TIS: 720-007

The Flush Seam Panel offers a concealed fastener and a tongue & groove seam that allows for thermal movement due to changes in ambient temperatures. The panel can be installed over solid substrates or over open perlins (upon review). Panel configurations can include low bead stiffeners, centerline V-Bean, one or two rows of venting (3.08 square inches of venting, per row, per linear foot of panel). Many of the colors are Energy Star compliant; see color chart for applicable data and colors. Custom colors are available upon request (minimum and overages will apply).





Notes:

- It is recommended to use stiffener beads for wider panel faces in order to minimize "oil canning". Oil canning is not a cause for rejection.
- 2" wide stiffening beads are available.


Temple Architectural Products
1111 Lowell St.
Elyria, Ohio 44035

(440) 323-9393
Estimates@templearchitecturalproducts.com
www.templearchitecturalproducts.com

1.0" REVEAL SEAM PANEL, VENTED

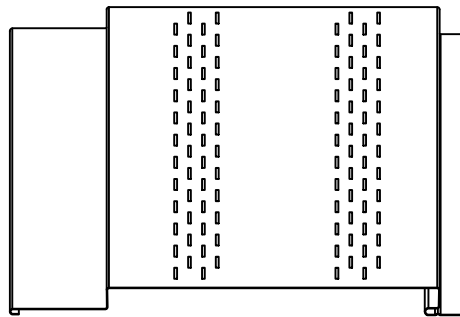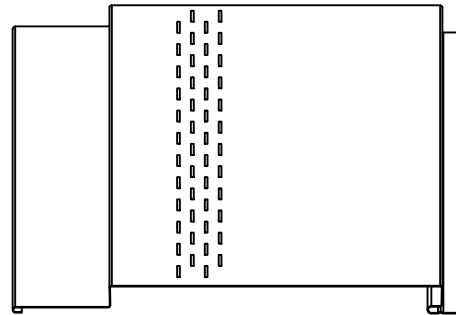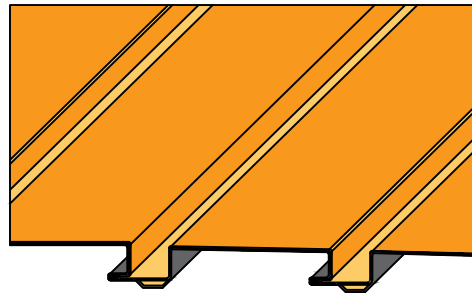

1" FLUSH PANEL WITH 1 ROW OF PANEL VENTING (VENTING LOCATION IS ADJUSTABLE), REVEAL IN $\frac{1}{2}$ " INCREMENTS FROM 0" TO 3"



1" FLUSH PANEL WITH 2 ROWS OF PANEL VENTING, REVEAL IN $\frac{1}{2}$ " INCREMENTS FROM 0" TO 3"

Available Material

Steel: 26 ga, 24 ga, 22 ga
 Aluminum: .032, .040
 Copper: 16 oz, 20 oz

Standard and Metallic Colors: 29
 Available Finishes: Kynar 500/Hylar 5000, SP

Test Data:

- Custom widths available upon request

Panel information and description:

TIS: 720-010

The Flush Seam Panel offers a concealed fastener and a tongue & groove seam that allows for thermal movement due to changes in ambient temperatures. The panel can be installed over solid substrates or over open perlins (upon review). Panel configurations can include low bead stiffeners, centerline V-Bean, one or two rows of venting (3.08 square inches of venting, per row, per linear foot of panel). Many of the colors are Energy Star compliant; see color chart for applicable data and colors. Custom colors are available upon request (minimum and overages will apply).

Notes:

- It is recommended to use stiffener beads for wider panel faces in order to minimize "oil canning". Oil canning is not a cause for rejection.
- 2" wide stiffening beads are available.

Temple Architectural Products
 1111 Lowell St.
 Elyria, Ohio 44035

(440) 323-9393
 Estimates@templearchitecturalproducts.com
 www.templearchitecturalproducts.com