


# TAPERED COPING, CONTINUOUS CLEAT CONCEALED FASTENED

**TEMPLE**  
Architectural Products

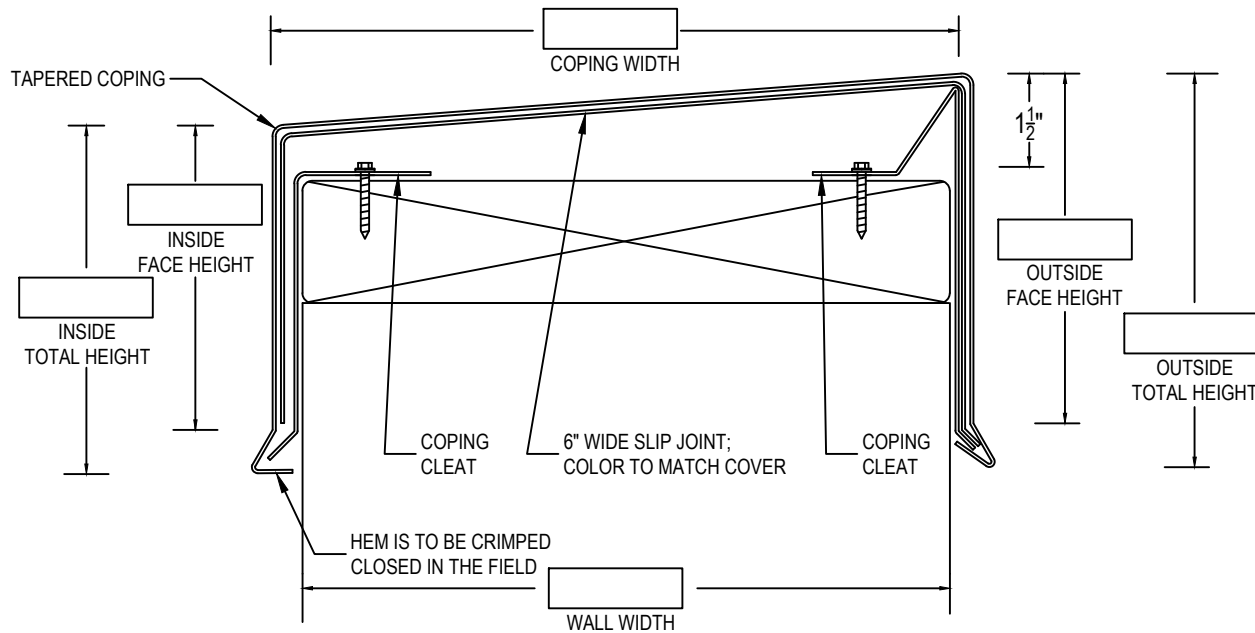

THIS PRODUCT IS ANSI/SPRI ES-1\* CERTIFIED  
LIMITED TO 5 3/4" OUTSIDE FACE,  
17 3/4" WALL WIDTH, AND 4" INSIDE FACE

MATERIAL (please choose one):

- |  |  |
|--|--|
| <input type="checkbox"/> 24 GA Steel   | <input type="checkbox"/> .040 Aluminum |
| <input type="checkbox"/> 22 GA Steel   | <input type="checkbox"/> .050 Aluminum |
| <input type="checkbox"/> .032 Aluminum | <input type="checkbox"/> .063 Aluminum |

Other: \_\_\_\_\_  
Color: \_\_\_\_\_  
Finish: \_\_\_\_\_

QUANTITIES:

\_\_\_\_\_ Total Linear Feet (10'-0" Lengths)  
\_\_\_\_\_ Outside Miter(s): \_\_\_\_\_ Degrees  
\_\_\_\_\_ Inside Miter(s): \_\_\_\_\_ Degrees  
\_\_\_\_\_ Right End Cap(s)  
\_\_\_\_\_ Left End Cap(s)

Miter/End Cap Fabrication Requirements:

- |   |   |
|---|---|
| <input type="checkbox"/> Pop Rivet & Sealed | <input type="checkbox"/> Welded (see note)* |
|---|---|

Installation:

- 1) Cleats are to be installed 40" O/C, coping hem crimped to cleat
- 2) 8 - 1.5" SS Ring Shank nails per cleat, minimum
- 3) Splice plates require 2 beads of sealant per side of coping

Sheet \_\_\_ of \_\_\_

DWG# 740-002b

Notes:

- 1) \*Accessory Welding is only available in .050 aluminum or heavier.
- 2) 6" wide slip joints are provided (1 per 10'-0" pc/2 per miter).
- 3) External splice plates are available upon request.
- 4) Written approval is required prior to fabrication, contractor is responsible for all dimensions and quantities. Fabricated items are not returnable.

Project Name: \_\_\_\_\_

Installing Contractor: \_\_\_\_\_

Contact Name: \_\_\_\_\_

Contact number: \_\_\_\_\_

Signed Approval: \_\_\_\_\_

Temple Architectural Products  
1111 Lowell St.  
Elyria, Ohio 44035

(440) 323-9393  
Estimates@templearchitecturalproducts.com  
www.templearchitecturalproducts.com