

NON-90 DEGREE COPING MITER





OUTSIDE MITER

#740-011-01

COPING SIZE _____

TAPERED COPING

FLAT COPING

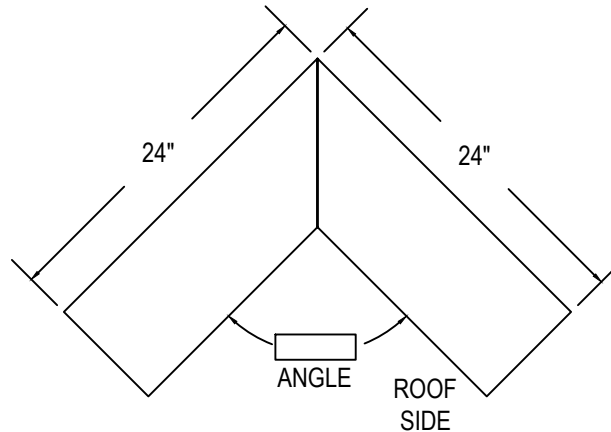



INSIDE MITER

#740-011-02

WALL SIZE _____

TAPERED COPING

FLAT COPING

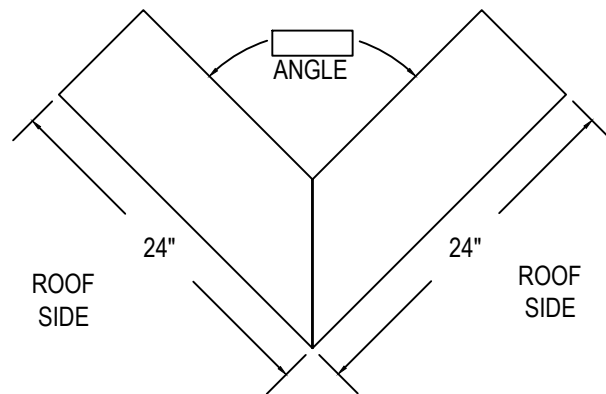

MATERIAL (please choose one):

24 GA Steel

22 GA Steel

.032 Aluminum

.040 Aluminum

.050 Aluminum

.063 Aluminum

Other: _____

Color: _____

Finish: _____

QUANTITIES:

_____ Outside Miter(s)

_____ Inside Miter(s)

_____ Degree Angle

Miter/End Cap Fabrication Requirements:

Pop Rivet & Sealed

Welded (see note)*

Installation:

- 1) Cleats are to be installed 40" O/C, coping hem crimped to cleat
- 2) 8 - 1.5" SS Ring Shank nails per cleat, minimum
- 3) Splice plates require 2 beads of sealant per side of coping

Sheet _____ of _____

DWG# 740-011

Notes:

- 1) *Accessory Welding is only available in .050 aluminum or heavier.
- 2) External splice plates are available upon request.
- 3) Written approval is required prior to fabrication, contractor is responsible for all dimensions and quantities. Fabricated items are not returnable.

Project Name: _____

Installing Contractor: _____

Contact Name: _____

Contact number: _____

Signed Approval: _____

Temple Architectural Products
1111 Lowell St.
Elyria, Ohio 44035

(440) 323-9393
Estimates@templearchitecturalproducts.com
www.templearchitecturalproducts.com