


MEMBRANE COMPRESSION EDGE 3

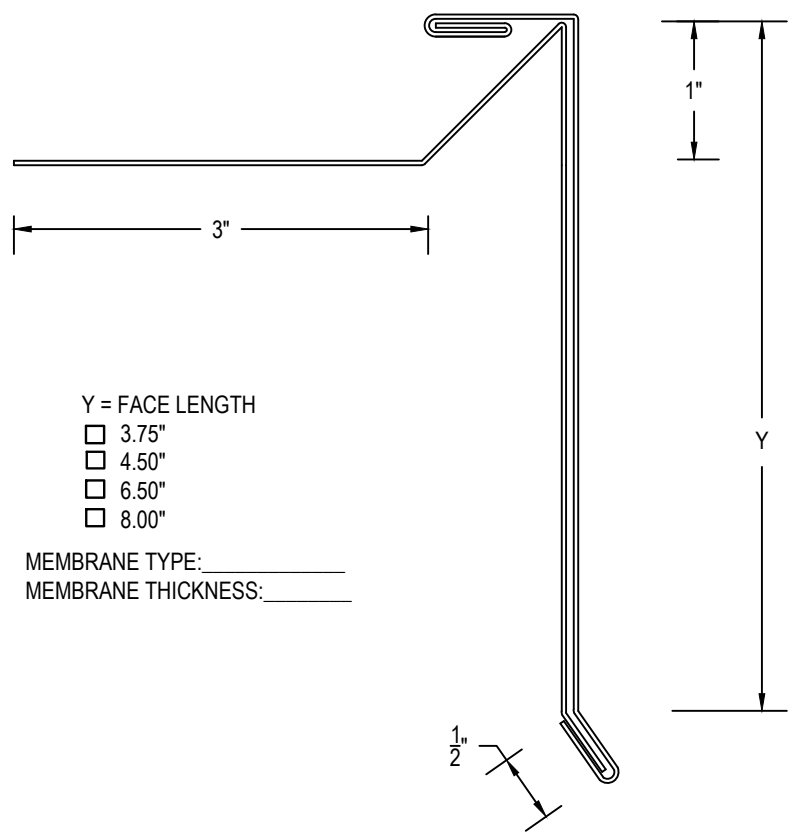

- Y = FACE LENGTH
- 3.75"
 - 4.50"
 - 6.50"
 - 8.00"

MEMBRANE TYPE: _____
 MEMBRANE THICKNESS: _____

MATERIAL (please choose one):

<input type="checkbox"/> 24 GA Steel	<input type="checkbox"/> .032 Aluminum
<input type="checkbox"/> 22 GA Steel	<input type="checkbox"/> .040 Aluminum

Other: _____
 Color: _____
 Finish: _____

CLEAT MATERIAL:

<input type="checkbox"/> 22 GA Steel (mill)	<input type="checkbox"/> 20 GA Steel (mill)
---	---

QUANTITIES:

_____ Total Linear Feet (10'-0" Lengths)
 _____ Outside Miter(s): _____ Degrees
 _____ Inside Miter(s): _____ Degrees

Miter/End Cap Fabrication Requirements:

<input type="checkbox"/> Pop Rivet & Sealed	<input type="checkbox"/> Welded (see note)*
---	---

Installation:
 1) Fastened at 6" O/C minimum or otherwise noted.
 2) 1.5" SS Ring Shank nails, minimum
 3) Splice plates require 2 beads of sealant per side at splice

Sheet ___ of ___ . DWG# 730-012

Notes:

- *Accessory Welding is only available in 040 aluminum or heavier
- 6" wide slip joints are provided (1 per 10'-0" pc/2 per miter/1 per end cap)
- External splice plates are available upon request
- Written approval is required prior to fabrication, contractor is responsible for all dimensions and quantities. Fabricated items are not returnable.

Project Name: _____
 Installing Contractor: _____
 Contact Name: _____
 Contact number: _____
 Signed Approval: _____

Temple Architectural Products
 1111 Lowell St.
 Elyria, Ohio 44035

(440) 323-9393
 Estimates@templearchitecturalproducts.com
 www.templearchitecturalproducts.com