


ROUND PENETRATION ASSEMBLY - 1

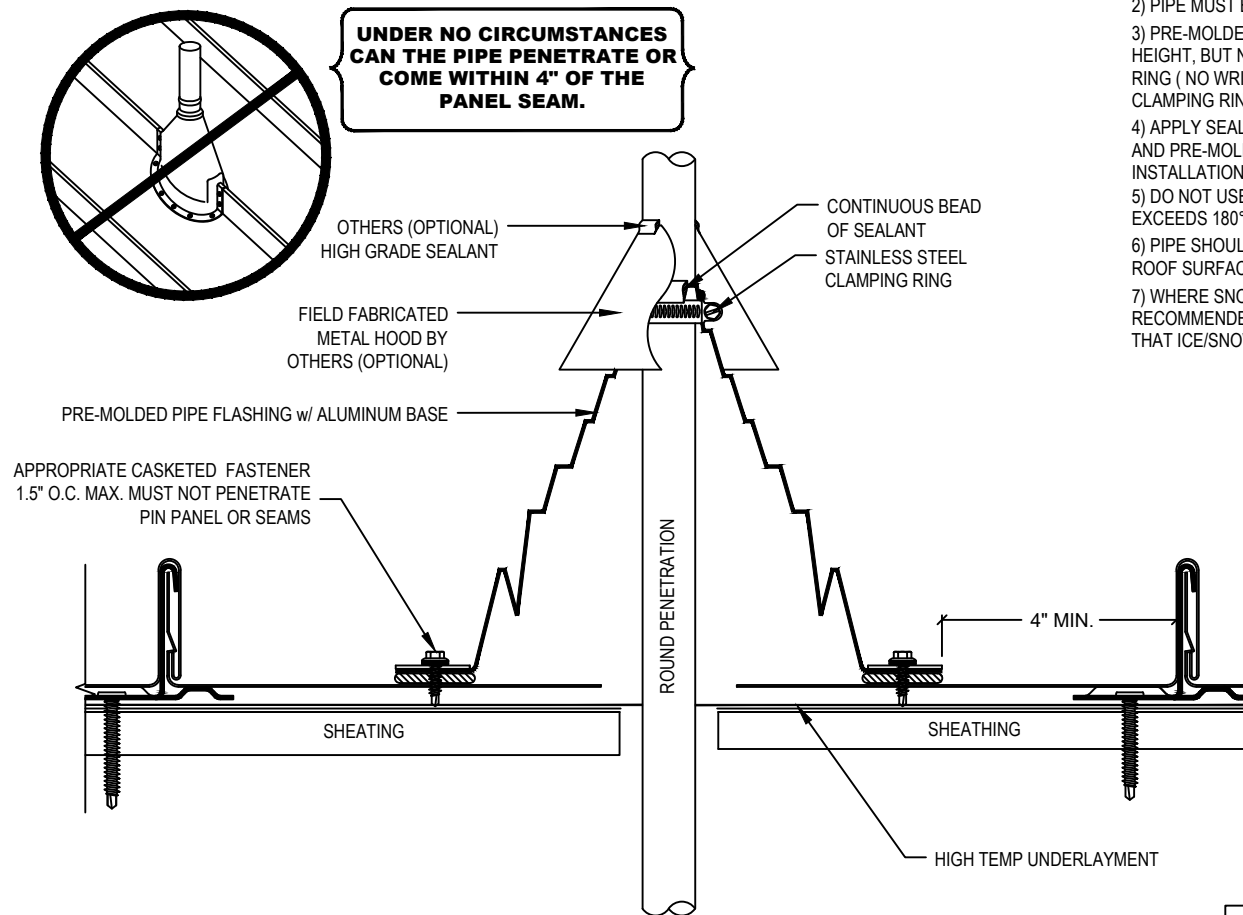

CAUTIONS:

- 1) PIPE SURFACE MUST BE FREE OF ALL RUST, GREASE, INSULATION, FOREIGN DEBRIS, ETC.
- 2) PIPE MUST BE ANCHORED TO ENSURE STABILITY.
- 3) PRE-MOLDED PIPE FLASHING MAY BE CUT TO HEIGHT, BUT NO LOWER THAN REINFORCING RING (NO WRINKLES OR FOLDS UNDER CLAMPING RING).
- 4) APPLY SEALANT BETWEEN PENETRATION AND PRE-MOLDED PIPE FLASHING PRIOR TO INSTALLATION OF CLAMPING RING.
- 5) DO NOT USE WHEN SERVICE LINE TEMP. EXCEEDS 180°F.
- 6) PIPE SHOULD EXTEND A MINIMUM OF 8" ABOVE ROOF SURFACE.
- 7) WHERE SNOW AND ICE ARE COMMON, IT'S RECOMMENDED UP-SLOPE OF PENETRATIONS THAT ICE/SNOW-DAM PROTECTION IS USED

P-1