
MEMBRANE COMPRESSION EDGE 1.75

TEA PLE Architectural Products

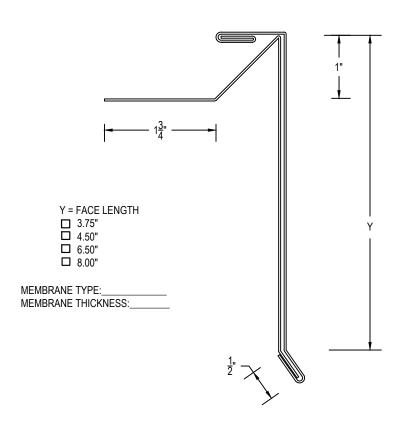

IVIATERIAL (please choose one):	
☐ 24 GA Steel☐ 22 GA Steel	□ .032 Aluminum □ .040 Aluminum
Other: Color: Finish:	
CLEAT MATERIAL:	
☐ 22 GA Steel (mill)	□ 20 GA Steel (mill)
QUANTITIES:	
Total Linear Feet (10'-0" Lengths) Outside Miter(s): Degrees Inside Miter(s): Degrees	
Miter/End Cap Fabrication Requirements:	
☐ Pop Rivet & Sealed	☐ Welded (see note)*
Installation: 1) Fastened at 6" O/C minimum or otherwise noted. 2) 1.5" SS Ring Shank nails, minimum 3) Splice plates require 2 beads of sealant per side at splice	
Sheetof	DWG# 730-013
	

Notes:

- 1) *Accessory Welding is only available in 040 aluminum or heavier
- 2) 6" wide slip joints are provided (1 per 10'-0" pc/2 per miter/1 per end cap)
- 3) External splice plates are available upon request
- 4) Written approval is required prior to fabrication, contractor is responsible for all dimensions and quantities. Fabricated items are not returnable.

Temple Architectural Products 1111 Lowell St. Elyria, Ohio 44035 (440) 323-9393 Estimates@templearchitecturalproducts.com www.templearchitecturalproducts.com

Project Name:	
Installing Contractor:	
Contact Name:	

Contact number: ______Signed Approval: _____